BRIDGERAIL™ AS5100.2 CL12.5 and NZTA Compliant Balustrade

Level - Standard 1.5 Mtr Spacing



Key features

- > Modular flexibility
- > No-weld assembly
- Flat pack delivery
- > Reduced corrosion
- Colour optionsBIM & CAD Support

Applications suited to

- > Cycle paths and bikeways > Shared pedestrian paths
- > Protection over culverts
- > Footbridges
- > Refer to applicable Aust and NZ Standards and Building Codes.

Specification Summary

Supply and install the proprietary Bridgerail™ BR20M barrier system to substrate according to Moddex specifications, or by a Moddex accredited installer.

Design Life

Standard design life of barrier is 100 years in C2 corrosivity zones.

Technical Data

Material

Stanchions, rails & balustrades	Steel/grade 250 & C350
Clamp fittings	Ductile iron
Clamp locking screws	Stainless steel (304)

Protective coating

Stanchions, rails and balustrades	G390 Hot-dip Galvanized (min 390g/m²)
Clamp fittings	Hot-dip Galvanized with patented protective coating on threads
Optional	Powder coating and paint specs

*The standard process for Powder Coated and Painted handrail products is as follows: black steel is used for fabrication. The steel is sand blasted and a zinc primer coating is applied. The powder coat / paint coat is then applied over the zinc primer creating a dual shield coating with a decorative finish.



Dimensions

Variable depending on building/application/

Stanchions

Dimensions	1255mm high
Nominal Thickness	16.0mm plate

Rails (Mesh Panel)

Diameter	48.3mm OD	
Nominal Thickness	4.0mm	

Base Plate

Nominal	16.0mm	
Thickness		

Mesh

Mesh Size	25 mm $\times 25$ mm $\times 3.25$ mm

Clamp fittings

Thickness	5.0mm (approx)
Locking screws	M12 x 1.75 x 11mm - DEXX [®] Drive

Expansion Joint

Diameter	39 mm
Length	300.0mm
Material	Steel Hollow Bar

Variable depending on building/application/

1.5m spacing (Top Mount)	86kg	
1.5m spacing (Face Mount)	111kg	

Fixings

Stanchion attachment to

Concrete	M16 mechanical concrete anchors or cast in studs/ferrules as specified.
Structural steel	M16 galvanized high tensile bolt set

Compliance

Moddex balustrades and handrails are designed and manufactured in accordance with Austroads Guide to Road Design, relevant statutory WHS Codes of Practice/ Guidelines, including AS5100.2.2017 CL12.5*. and the NZTA Bridge Manual B6.4**. Galvanized to AS 4792 and AS/NZS 4680:2006 (where applicable). The manufacture of Bridgerail proprietary systems is in accordance with Moddex specifications and manufacturing processes, and this may differ to some jurisdictional specifications for steelwork fabrication. bridges and related structures.

* Forces from wind load, water and debris or earthquakes are to be determined by the bridge designer/engineer. The bridge designer/engineer must request and confirm (not assume) adequacy for these projects specific requirements, before specifying or approving this barrier system for use.

**Excluding where the road controlling authority requires the barrier to restrain crowds or people under panic conditions

Testing

Stringent vibration endurance tests have been performed and independent testing has been carried out to confirm the suitability of the Moddex system in maritime conditions.

Warranty

5 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations, unless otherwise negotiated at the time of purchase.


— Refer maintenance manual


Inspection & Maintenance

Visual inspection for any damage or loose fixings must be done periodically and prior to use. No certified maintenance required. Basic wear and tear preventative maintenance is recommended, as per manufacturer's specifications and recommendations.

Technical Information 12 DIA ROUND BAR MODDEX 40NB (HEAVY) HDG PIPE .050 25mm x 25mm x 3mm MESH


Mount Dimensions





*Custom mounting options available

Expansion Detail



Standard References

Austroads Guide To Road Design; Part 6A

5.5.3 The installation of a fence at the side of a path used by cyclists is desirable where:
there is a steep batter or large vertical drop located in close proximity to the path
the path is adjacent to an arterial road and it is necessary wto restrict cyclist access to the road
a bridge or culvert exists on a path
a hazard exists adjacent to a particular bicycle facility

cyclists are likely to be 'blazing a separate trail' at an intersection between paths or around a path terminal.

Australian Standard Bridge Design; Part 2

This Standard was prepared by the Standards Australia Committee BD-090, Bridge Design, to supersede AS 5100.2—2004.

This Standard is also designated as Austroads publication AP-G51.2-17.

 $The \ objectives \ of the \ AS(AS/NZS) \ 5100 \ series \ are \ to \ provide \ nationally \ acceptable \ requirements \ for matter \ acceptable \ a$

(a) the design of road, rail, pedestrian and cyclist path bridges;

(b) the specific application of concrete, steel, timber and composite construction, which embody principles that may be applied to other materials in association with relevant standards;

(c) the assessment of the load capacity of existing bridges; and

(d) the strengthening and rehabilitation of existing bridges.

The objective of this Part (AS 5100.2) is to specify minimum design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated and respective of this Part (AS 5100.2) is to specify minimum design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated design loads and load effects for road, rail, pedestrian and cyclist path bridges, and other associated design loads and load effects for road, rail, pedestrian and cyclist path bridges, and the road effects for road effects for road, rail, pedestrian and cyclist path bridges, and the road effects for road estructures.

 $The requirements of the AS(AS/NZS)\,5100\,series\,are\,based\,on\,the\,principles\,of\,structural\,mechanics\,and\,knowledge\,of\,material\,properties,\,for\,both\,the\,conceptual\,and\,for\,fine the conceptual\,for\,fine the conceptual and for the co$ detailed design, to achieve acceptable probabilities that the bridge or associated structure being designed will not become unfit for use during its design life.

NZTA Bridge Manual Clause B6.4*

Pedestrian, cyclist and equestrian barriers shall be designed for the most extreme of the following loads:

a. horizontal and vertical service loads of 1.75kN/m applied to the top rail

b. a horizontal service load of 1.5kN/m $^{\rm 2}$ applied to the gross area of the barrier

c. a point load of 0.5kN in any direction at any point.

* Excluding where the road controlling authority requires the barrier to restrain crowds or people under panic conditions

Important Note: Failure to supply and/or install proprietary product in accordance with above Standards and codes, specification and instructions, voids complete system certification and/or warranty.

Designed and manufactured by Moddex. @Moddex Group. All Rights Reserved.

For information or technical support please contact us

T 1800 663 339 (AU)

T 0800 663 339 (NZ)

8. ALL COMPONENTS OF THE MODDEX WALKWAY AND/OR

3ARRIER SYSTEM INCLUDING, FIXINGS SHALL BE SUPPLIED

7. ALL WELDS TO BE IN ACCORDANCE WITH MODDEX WPS1

AND/OR AS1554.1SP.

TABLE & FIXING NOTE
6. THE SUPPORTING STRUCTURE SHALL BE DESIGNED TO
ACCOMMODATE THE SPECIFIED HANDRAIL FIXINGS,

100 YEARS IN C2 CORROSIVE ZONE

DESIGN TABLE: 1. DESIGN LIFE 2. LOADING

AS5100.2, CLAUSE 12.5, NORMAL

LOAD

3. THE STRUCTURE DESIGNER IS RESPONSIBLE FOR ENSURING

THE NECESSARY SUPPORTING STRUCTURE IS PROVIDED

FOR THE BARRIER SYSTEM,

1. THESE SPECIFICATIONS SHALL TAKE PRECEDENCE UNLESS

2. ALL WORK AND MATERIALS SHALL COMPLY WITH THE

BUILDING ACT & REGULATIONS


OTHERWISE ADVISED BY THE DESIGN ENGINEER,


4. FORCES FROM WIND LOAD, WATER AND DEBRIES SHALL BE DETERMINED BY THE BRIDGE DESIGNER/ ENGINEER. OTHERWISE, THEY WILL BE ASSUMED AS NEGLIGIBLE LOADS

5. THE SUPPORTING STRUCTURE SHALL BE DESIGNED FOR

COMPARED TO OTHER LOADS FROM CLAUSES (a) TO (c). THE MINIMUM DESIGN LOADS SPECIFIED IN THE DESIGN

BR20M Bridgerail Barrier Specifications

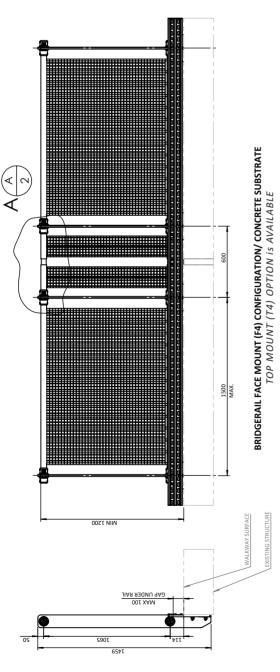

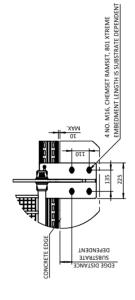

AREA GLE LOAD OF 0.6kN ACTING

OVER AREA OF 0.1mX0.1M

1.0kPa TRANSVERSE ON INFILL

TRANSVERSE AWAY FROM THE PATH ON INFILL AREA

TRANSVERSE (SIMULTANEOUSLY)

ON TOP RAIL

0.75kN/m LONGITUDINAL &

3. LIVE LOADING

SYSTEM COULD BE MODIFIED TO ACCOMODATE AS5100.2,

CLAUSE 12.5 (A) TO (D) FOR CROWD LOADS.

Q Q. 135 0 0

F4 MOUNT STANDARD SPEC. CUSTOM MOUNT IS AVAILABLE.

590T

1569

225

© MODDEX GROUP Pty Ltd. All rights reserved. All design, data and specifications contained herein are confidential and remain intellectual property of MODDEX GROUP Pty Ltd. All material and dimensions must be checked and verified prior to manufacture or assembly.www.moddex.com

DESIGNED	DRAWN	СНЕСКЕD	APPROVED	p ^ ^ i b
			44 Kalman Drive Boronia VIC 3155	
		15/03/2022	21/09/2021	DATE
		AM	AM	ВУ
		DESIGN UPDATE	MODDEX DATA REVIEW/UPDATE	CHANGE DESCRIPTION
		7	1	REV.

LAST SAVED BY: AN	UNIT: METRIC	FINISH: HDG-ZINC (POWDER COATED AVAILABLE)	MATERIAL: AS SPECIFIED	FY	NOT TO SCALE	p`^ib
ASSEMBLY				15/03/2022	DAV	APPROVED
		BR20M BridgeRail Barrier Specification	BR20M BridgeRail F	15/03/2022	AOL	СНЕСКЕD
BR20M		,	MODDEX	21/09/2021	AM	DRAWN

15/02/2020

Ā

T4 MOUNT STANDARD SPEC. CUSTOM MOUNT IS AVAILABLE.

BRIDGERAIL TOP MOUNT (T4) CONFIGURATION/ STEEL SUBSTRATE FACE MOUNT (F4) OPTION IS AVAILABLE

190

MAX 100 GAP UNDER RAIL


4 NO. M16 STRUCTURAL BOLTS

XISTING STRUCTURE

ST SAVED BY: AM- 15/03/2022

BR20N

BR20M Bridgerail[™] Bridge Rail Barrier Specifications

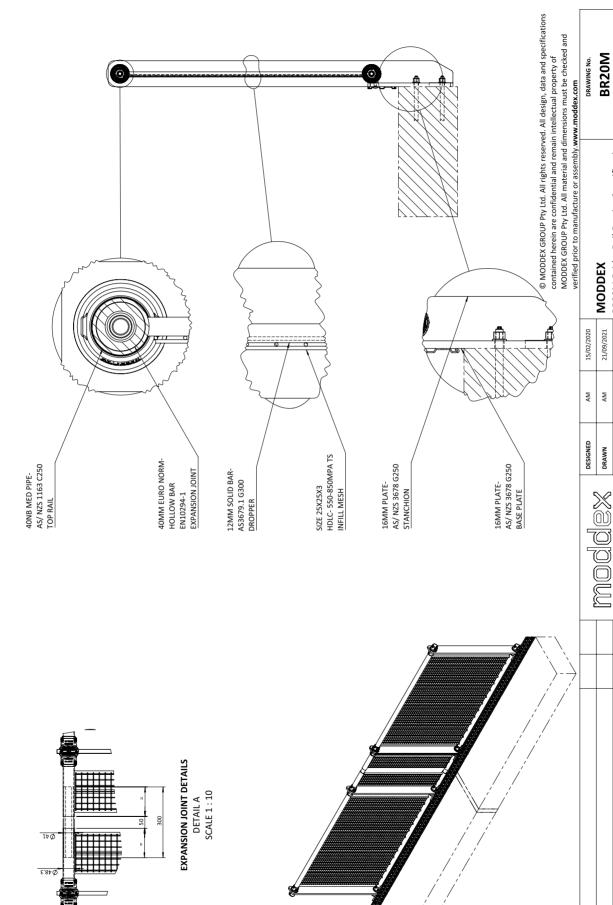

(TOUR DEVENO
	7 D D
-	4
	arroll D
-	X
	2
	×
	2
-	20
	act Ir
	manii
	000
	DESIGNED TO

UNIT: LAST SAVED BY: AM- 15/03/2022

FINISH: HDG-ZINC (POWDER COATED AVAILABLE)

MATERIAL: AS SPECIFIED

DAV NOT TO SCALE

SCALE

APPROVED

MODDEX GROUP Pty Ltd 44 Kalman Drive Boronia VIC 3155

15/03/2022 21/09/2021 DATE

A A

MODDEX DATA REVIEW/UPDATE
CHANGE DESCRIPTION

REV.

DESIGN UPDATE

7

BR20M BridgeRail Barrier Specification

15/03/2022 15/03/2022 A3

JDR

CHECKED

ASSEMBLY